


3BB HR-245-18/Cb—HR-275-18/Cb

Mono-Crystalline Silicon Module

Hareon Solar Technology Co., Ltd.

Huangtang Industrial Zone, Xuxiake Town, Jiangyin, Jiangsu, China, 214407
Tel: +86 (510) 6628 6100 Fax: +86 (510) 8653 0512 E-mail: sales@hareon.net
www.hareonsolar.com

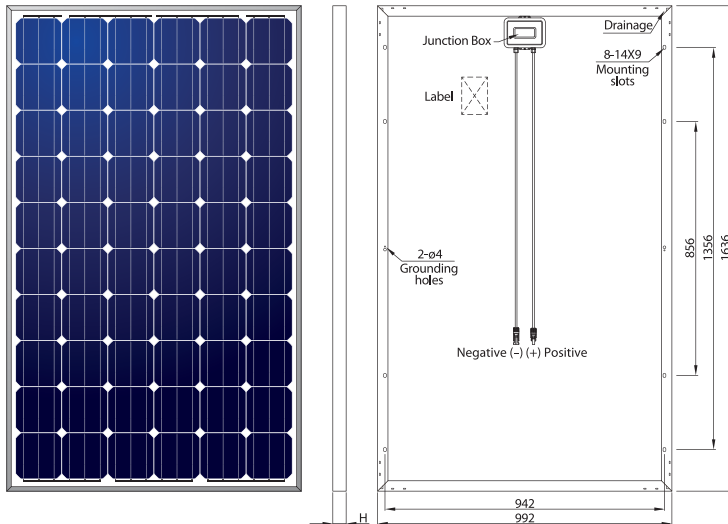

MECHANICAL PARAMETERS

Cell (mm)	156×156 Mono
Weight (kg)	19.0/19.3
Dimensions (L×W×H) (mm)	1636×992×35/40
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	60(6×10)
No. of Diodes	3

QUALIFICATION

Max. System Voltage	1000VDC
Temperature Cycling Range	-40°C~+85°C
Max. Series Fuse	15 A
Max. Wind Load / Max. Snow Load	2400Pa / 5400Pa
Damp Heat Test	85°C and 85% relative humidity for 1000h
Hot Spot Free	100%EL inspection before and after lamination



ELECTRICAL PARAMETERS

TYPE	HR-245W	HR-250W	HR-255W	HR-260W	HR-265W	HR-270W	HR-275W
STC AM 1.5, 1000W/m ² , Module Temperature 25°C	Rated Max. Power at STC (W)	245	250	255	260	265	270
	Max. Power Voltage / Vmp (V)	30.30	30.40	30.50	30.60	30.70	30.80
	Max. Power Current / Imp (A)	8.09	8.22	8.36	8.50	8.63	8.77
	Open Circuit Voltage / Voc (V)	37.42	37.51	37.59	37.73	37.91	38.10
	Short Circuit Current / Isc (A)	8.73	8.88	9.03	9.18	9.31	9.45
	Module Efficiency (%)	15.10	15.40	15.71	16.02	16.33	16.64
NOCT AM 1.5, 800W/m ² , Ambient Temperature 20°C, Wind Speed 1m/s	Rated Max. Power at NOCT (W)	177.8	181.5	185.2	188.9	192.4	196.1
	Max. Power Voltage / Vmp (V)	27.60	27.70	27.80	27.90	28.00	28.09
	Max. Power Current / Imp (A)	6.44	6.55	6.66	6.77	6.87	6.98
	Open Circuit Voltage / Voc (V)	34.40	34.50	34.60	34.70	34.90	35.07
	Short Circuit Current / Isc (A)	7.05	7.17	7.29	7.41	7.52	7.63
	Module Efficiency (%)	13.69	13.98	14.26	14.55	14.82	15.10
Temperature Coefficient of Pm				-0.428%/°C			
Temperature Coefficient of Voc				-0.322%/°C			
Temperature Coefficient of Isc				+0.055%/°C			
Nominal Operating Cell Temperature				45°C±3°C			
Output Tolerance				0~5W			

PACKING CONFIGURATION

MODULE SIZE	CONTAINER	20'GP	40'HC
1636×992×35	Pieces Per Pallet	28	28
	Pallets Per Container	6	28
	Pieces Per Container	168	784
	Pieces Per Pallet	25	25
1636×992×40	Pallets Per Container	6	28
	Pieces Per Container	150	700

255W CURVES

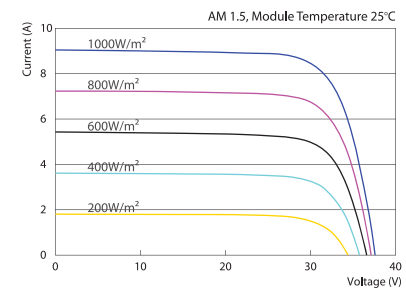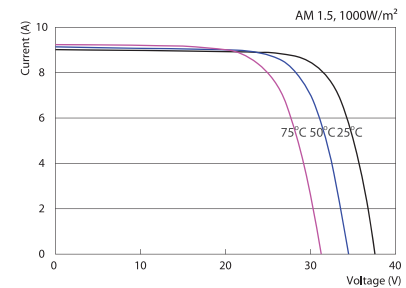

LINEAR WARRANTY

- No more than 3% peak power degradation in 1st year;
- No more than 0.7% peak power degradation in coming 24 years;
- Free from defects of materials and workmanship for 10 years.